


architectural BRONZE CASEMENTS

SLIMLINE DOOR DATA SHEET

Our Slimline Doors are designed with a bead detail to compliment our Advanced casements. Available as french doors or single openers, the slim door system provides narrower sight lines over our Solid Bronze doors. Ideal for use as an internal or external door; with locking options available.

SECTION THROUGH SLIMLINE BRONZE DOORS

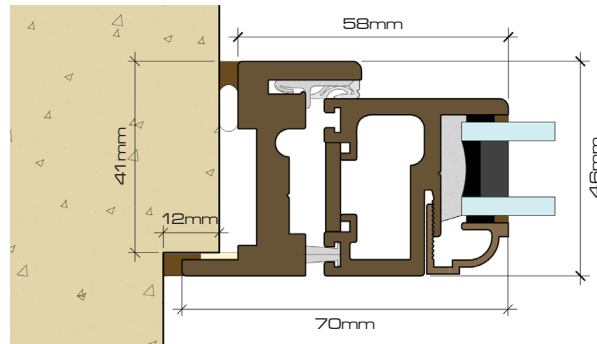

DIMENSIONS

Frame depth	46mm
Sightline (internal)	58mm

FEATURES

Slim frame profile.
Equal leg profile available for flush reveals.
Optional contemporary style bead available.
Optional glaze bar detail to match casements.
Outward and inward opening.

RECOMMENDED DESIGN LIMITS

Single Door	Max O/A width	911 mm (850mm Door leaf)
	Min O/A width	561 mm (500mm Door leaf)
	Max O/A height	2245mm (2200mm Door leaf)
Double doors	Max O/A width	1765mm (850mm Door leaf)
	Min O/A width	865mm (400mm Door leaf)
	Max O/A height	2245mm (2200mm Door leaf)

The inclusion of glazing bars, opaque glazing and/or abutment details may alter performance data and design limits. Please contact our sales team to discuss any requirements outside of the standard size limits detailed above.

U-VALUE

U-value performance based on a 20mm sealed double glazed unit made up of 4mm tough/12mm 90% Krypton filled cavity/4mm tough Planitherm total + with warm edge spacer:

Single door overall value	2.1 W/m ² K
Double door overall value	2.1 W/m ² K
Centre pane value	1.1 W/m ² K

U-values calculated in accordance with BS EN ISO 10077-1:2006. Worst case system value 2.5W/m²K based upon double doors including four glazing bars per leaf.